


PIN	SIGNAL	PIN	SIGNAL
*A	+35V	*H	P. MON. GND
*B	+35V RTN	*J	-
*C	+5V (3)	K	-
*D	+5V RTN (3)	L	-
*E	+5V RTN (4)	M	ENABLE ANALOG SWITCHES
*F	+16V RTN (3)	N	RETURN
*G	-16V RTN (3)	*P	+35V RTN (2)

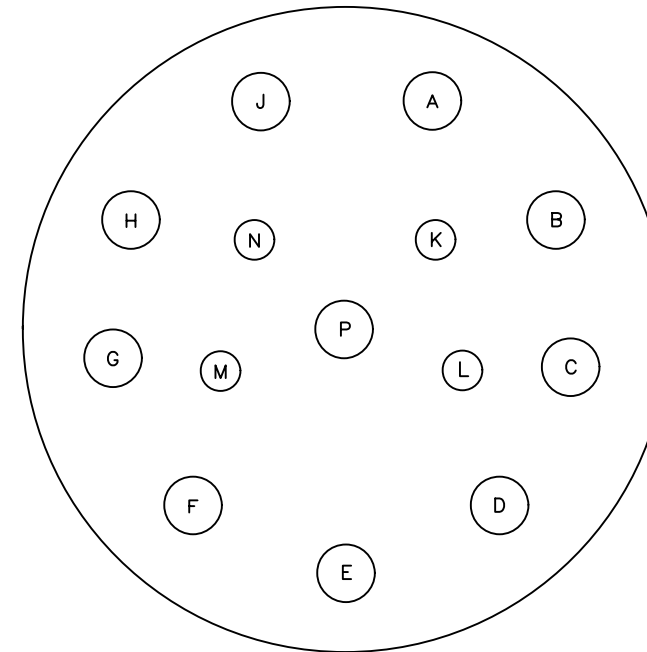

AMPHENOL #

MS3112E-28-20P
MS3116F-28-20S

PANEL MOUNT, MALE
CABLE MOUNT, FEMALE, *A* TERMINATION

(FRONT VIEW)
(READ VIEW)

REVISION

UNIVERSITY OF CALIFORNIA LICK OBSERVATORY		DEIMOS EXTERNAL CCD POWER SUPPLY 14-PIN CONNECTOR WIRING	
DES'N BY: B. Alcott	ORIGIN DATE: 05-23-98	DWG. NO.	NUM. 1 OF 1
Last SN	MODIFY DATE: 03-25-99	EL-3182-1D	
PATH: DEIMOS\SDSU2CCD\CONN14			