


A

A

Description Outer drum signals - Patch cable
 Quantity 1
 Length 6 feet
 material Belden 9515 (15 pr. 24 AWG, 13 pr. used)
 conn#1 PT06SE16-26P (SR)
 conn#2 PT06SE16-26S (SR)

B

B

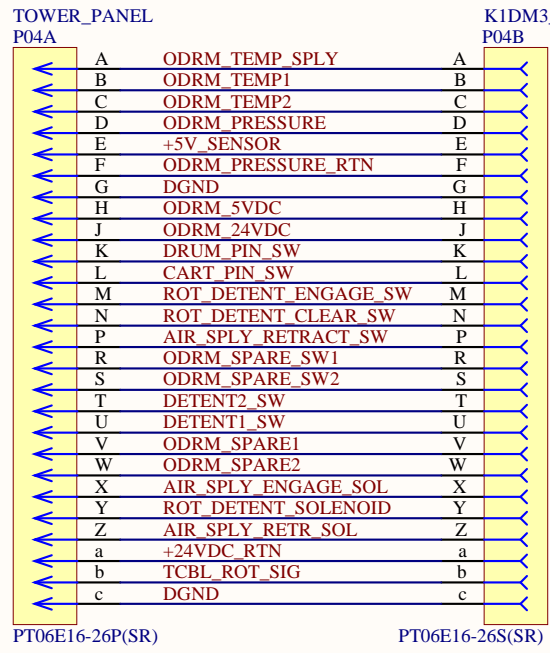

Conn#1	Conn#2	pair	wire
A	A	black & red	red
B	B	black & red	black
C	C	black & white	white
D	D	black & white	black
E	E	black & green	green
F	F	black & green	black
G	G	black & blue	blue
H	H	black & blue	black
J	J	black & yellow	yellow
K	K	black & yellow	black
L	L	black & brown	brown
M	M	black & brown	black
N	N	black & orange	orange
P	P	black & orange	black
R	R	red & white	white
S	S	red & white	red
T	T	red & green	green
U	U	red & green	red
V	V	red & blue	blue
W	W	red & blue	red
X	X	red & yellow	yellow
Y	Y	red & yellow	red
Z	Z	red & brown	brown
a	a	red & brown	red
b	b	red & orange	orange
c	c	red & orange	red
shell	shell		shield

C

C

D

D

	UC OBSERVATORIES	K1DM3	KECK 1 DEPLOYABLE TERTIARY MIRROR	
	DRAWN: SANDFORD		LW0200 external cabling	
	ENGR: SANDFORD	Outer drum signals - patch		
	872-LW0200-ExternalCabling.PrjPcb	872-LW0224	REV 00	A
872-LW0224-OuterDrumSignalPatch_r00.SchDoc				